

CORDLESS DRIVER DRILL PMD12V

	Accessories			
Battery capacity	0.8-10mm	2 batteries		
Battery voltage	12v	Weight	1.45 kg	Charger
No load speed	0-350 / 0-1350 rpm			Carrying Case
Max torque	24 N.m			



CORDLESS IMPACT DRIVER PMID12V

	Accessories				
Battery capacity	2.0 Ah	Keyless chuck	1/4" hex 6.35mm	2 batteries	
Battery voltage	12V	Weight	1.68 kg	Charger	
No load speed	0-2600 rpm			Carrying case	
Max torque	125 N.m				



LI-ION CORDLESS IMPACT DRIVER PMD108LT


Technical specification					
Battery type	lithium-ion	Max torque	90 N.m		
Battery capacity	2.0 Ah	Keyless chuck	1/4" hex 6.35mm		
Battery voltage	10.8v	Weight	1.05 kg		
No load speed	0-2400 rpm				

Accessories
2 batteries
Charger
Carrying Bag



LI-ION CORDLESS IMPACT DRIVER PMID12LT

	Accessories			
Battery type	lithium-ion	Max torque	125 N.m	2 batteries
Battery capacity	2.6 Ah	Keyless chuck	1/4" hex 6.35mm	Charger
Battery voltage	12v	Weight	0.95 kg	Carrying Bag
No load speed	0-2400 rpm			

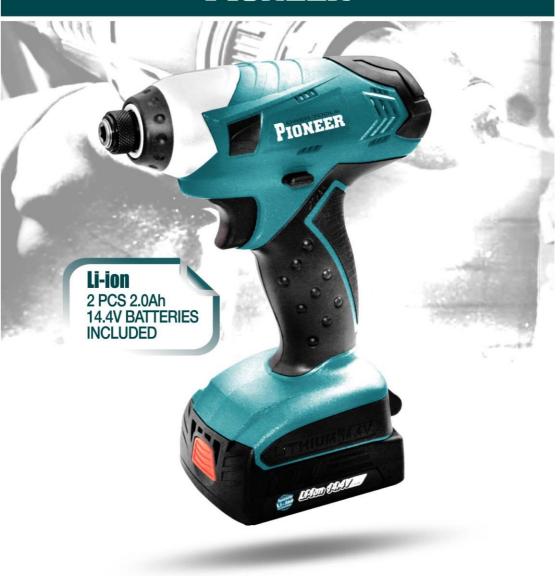

LI-ION CORDLESS IMPACT DRIVER PMID14LT

	Accessories				
Battery type	lithium-ion Max torque		145 N.m	2 batteries	
Battery capacity	2.0 Ah	Keyless chuck	1/4" hex 6.35mm	Charger	
Battery voltage	14.4V	Weight	1.08 kg	Carrying Case	
No load speed	0-2400 rpm				



LI-ION CORDLESS IMPACT DRIVER PMID18LT

	Accessories			
Battery type	lithium-ion	Max torque	200 N.m	2 batteries
Battery capacity	3.0 Ah	Keyless chuck	1/4" hex 6.35mm	Charger
Battery voltage	18v	Weight	1.08 kg	Carrying Case
No load speed	0-2700 rpm			



LI-ION CORDLESS IMPACT WRENCH PWD18LT

	Accessories			
Battery type	lithium-ion	Max torque	200 N.m	2 batteries
Battery capacity	3.0 Ah	Keyless chuck	1/2 hex 12.7 mm	Charger
Battery voltage	18v	Weight	1.08 kg	Carrying Case

No load speed 0-2700 rpm



ELECTRIC HAMMER DRILL PHD1010

Technical spe	Drilling Capacity		
Rated input power	900w	Masonry	13mm
No load speed	0-2800 rpm	Wood	30 mm
Chuck Diameter	13 mm	Steel	13 mm
Net weight	1.7 kg		



ROTARY HAMMER PRH950

Tecl	drilling C	apacity			
Rated input power	800w	Net weight	2.6 kg	Masonry	68mm
No load speed	0-900 rpm	Quick change	9	Concrete	26mm
Impact rate	0-4000 pm			Wood	30 mm
Impact power	3.0 J			Steel	13 mm

Accessories
3 drills
2 chisels
Quick change chuck



CORDLESS ROTARY HAMMER PCH24V

Technical specification			drilling C	apacity	Accessories	
Rated input powe	r 450w	Impact power	3.0 J	Concrete	22mm	2 PCS
Hammer volts	24V	Net weight	3.0 kg	Wood	30mm	2.6Ah/24V batteries
No load speed	0-1000 rpm			Steel	13mm	Auxiliary handle
The second secon	SECURIOR SECURITION OF SECURITION			Otooi	1011111	Depth gauge
Impact rate	0-4600 pm	pm				3 Drill bits
					Charger	
						Carrying case

PIONEER TOOLS



JIG SAW PJS600

Technical specification				Cutting depth		Features	
Rated input power	600w	Cutting angle range	0-45°	Wood	80mm	Quick blade change	
No load speed	0-3000 rpm	Dust port		steel	10mm	4 angle cutting adjustment	
Net weight	2.8 kg					All aluminum	
						Speed adjustment	



CORDLESS JIG SAW PCJ192V

Technical specification			Cutting depth		Accessories		
Rated input power	200w	Laser guide control	trol Wood 80mm		2 pcs 2.6Ah/19.2V batteries	Dust adapter	
Rated voltage	19.2V	Dust adapter	steel	10mm	2 pcs hex keys	Foot cover	
No load speed	0-2100 rpm	Adjust capacity +-450			Splintering protector	Charger	
Net weight 2.5 kg					2 pcs saw blades	Carrying case	
-	_				Guide fence		




CIRCULAR SAW PCS13

Te	Max cutting capacity			
Rated input power	1300w	Dust port		90° 63mm / 45° 42mm
No load speed	4500 rpm	Blade diameter	185mm	
Net weight	4.4 kg			



ANGLE GRINDER PAG2107

Technical spi	Accessories	
Rated input power	900w	Auxiliary Handle
No load speed	0-11000 rpm	Wrench
Net weight	2.1 kg	Tool does not come
Disc diameter	115mm	with disc

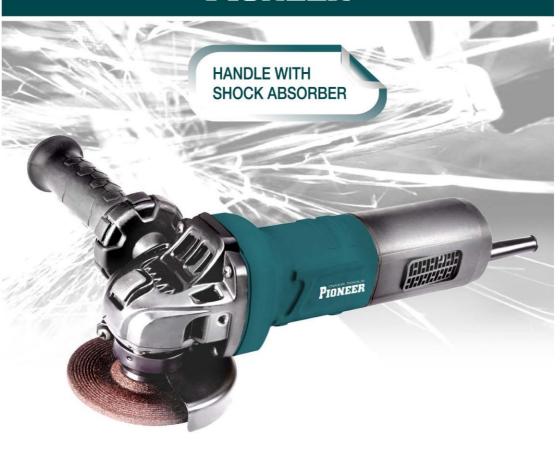


ANGLE GRINDER PAG115G

Technical spe	Accessories		
Rated input power	860w	Auxiliary Handle	
No load speed	10000 rpm	Wrench	
Net weight	2.54 kg	Tool does not come	
Disc diameter	115mm	with disc	



ANGLE GRINDER PAG2113

Technical s	pecification	Accessories
Rated input power	2000w	Auxiliary Handle
No load speed	6500 rpm	Wrench
Net weight	4.5 kg	Tool does not come
Disc diameter	230mm	with disc
Soft start		

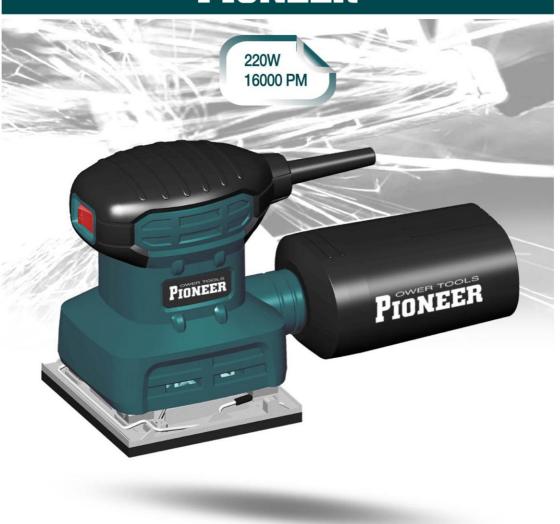

PALM SANDER PSS200W

Technical spe	cification
Rated input power	220w
No load speed	16000 pm
Pad size	112x104 mm
Quick Release Sander F	aper
Dust adapter	
Net weight	1.1 kg



ECCENTRIC SANDER PSE420W

recillical specification				
Rated input power	450w			
No load speed	0-13000 rpm			
Pad size	125 mm			
Dust adapter				
Net weight	2.3 kg			

PIONEER TOOLS



LI-ION CORDLESS SANDER PSM72V

	Technical	specificatio	Features	Accessories	
Battery type	lithium-ion	Sanding sheet	size 100x100x140mm	Compact sander	3 sanding sheets
Battery capacity	2.0 Ah	Net weight 0.7 kg		Quick release sander paper	Charger
Battery voltage	7.2v			Led battery power indicator	
Sanding plate speed	9000 spm			Soft Ergonomic grip	





INVERTER IGBT MMA WELDING MACHINE PR200

	Accessories			
Input capacity	7.1kw	Efficiency	87%	5 m' electric cable
No-load voltage	78v	Weight	6.5 kg	Electrode holder
Current arrange	10-200A			Earth clamp
Rated duty cycle	55%@200A 75%@140A			Face mask
				Welding brush

FEATURES: Advanced IGBT inverter 3 generation technology. Compact, portable, highly effective, low consumption, energy saving. With strong compensation capability, resistant to voltage fluctuation, stable welding current. Anti-stick, thermostatic control, fan cooled, carrying strap and handle. Hot start, arc force, overload protection. Applicated for welding of all kinds of ferrous metals such as low and medium carbon steel, alloy steel etc'.



ELECTRIC AIRLESS PAINT SPRAYER PAL800W


Technical specification					
800w	Recommended to choose paint pail 28x30cm (diameter x height)		Intelligent PLC control system		
3000psi, 207 bar			Special control valve structure		
6235psi, 430bar	Standard air hose	15m (length)	High precision stainless steel		
1800ml/min	Extended pipe	50 cm	piston pump		
300mm	Including hose and g	un	Removable frame		
250-310mm	Net weight	28 kg	Accessories		
	800w 3000psi, 207 bar 6235psi, 430bar 1800ml/min 300mm	800w Recommended to ch 3000psi, 207 bar 28x30cm (diameter x 6235psi, 430bar Standard air hose 1800ml/min Extended pipe 300mm Including hose and g	Recommended to choose paint pail 28x30cm (diameter x height) 28x30cm (diameter x height) 6235psi, 430bar Standard air hose 15m (length) 1800ml/min Extended pipe 50 cm 300mm Including hose and gun		

Including hose and gun



MITTER SAW PMS19

Technical specification			Cuttin	g Capacity	Accessories	
Rated input power	er 2000w	Soft start	Mitre 0 / bevel 00	70x130mm; 45x155mm	Hex key	Dust bag
No load speed	4500 rpm	Blade size 255m	m Mitre 0 / bevel 45 ⁰	40x135mm	Wrench	5 pcs
Weight	13.8 kg	Blade bore 16mn	Mitre 45 / bevel 00	70x90mm; 45x100mm	Clamp	outer blade
Laser guide control		Mitre 45 / bevel 450	40x90mm	2 pcs supporters	washers	
			Measurement	57x46.5x39cm		

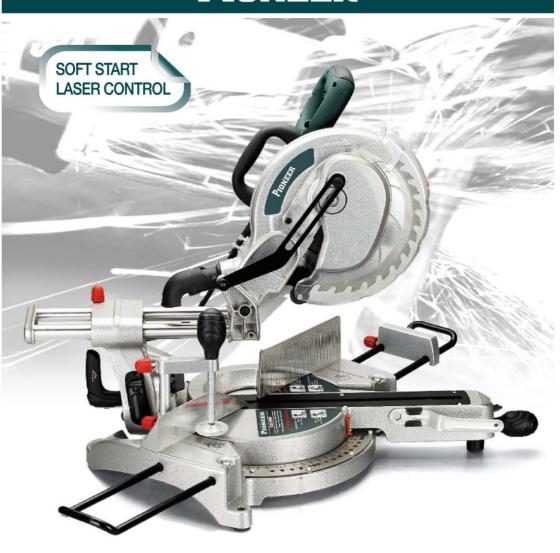

MITTER SAW PMSP19

Technical specification				Cutting Capacity		Accessories	
Rated input power	er 2000w	Blade size	255mm	Mitre 0 / bevel 00	85x300mm	Hex key	Dust bag
No load speed	4500 rpm	Blade bore	16mm	Mitre 0 / bevel 450	85x210mm	Wrench	5 pcs outer blade
Weight	19.5 kg	Sliding cut		Mitre 45 / bevel 00	45x300mm	Clamp	washers
Laser guide control		length	192mm	Mitre 45 / bevel 450	45x150mm/45x210mm	2 pcs supporters	Repetitive cut set plate
Soft start				Measurement	74x54x43cm		